




L-rod Assembly Instructions for Installation

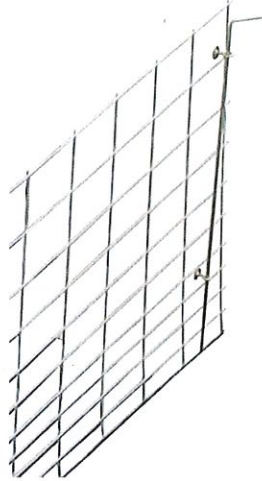

Calf-Tel L-rod Bill of Material:

Item	Item Number	Description	Qty
1	CH-3332A-2	Fence L-rod	2
2	CT-9100-1	Fence Attachment Hardware	2

Tools Needed:

- 1. 1/2 in Socket & Ratchet

Installation Instructions:

Step 1: Thread on a nut, lock washer and then the fender washer. Insert eyebolt into hole in side of hutch.




Step 2: Large fender washer should be installed against the hutch on the outside. Next, add a lock washer. A nut should be installed on top of the lock washer. This helps adjust the eyebolt out to the correct distance (approx. 1.5" to the center of the eye on the top and 1.75" to the center of the eye on the bottom).





Step 3: Install the large fender washer against the hutch on the inside of the hutch. Then, add a lock washer and secure in place with a nut. This helps tighten the eyebolt in place once the desired location is established on the outside.



Step 4: Fence is locked into position when the upper eyebolt and the lower eyebolt are within one section on the fence. This keeps the fence from moving forward and backward.

